Outdoor Solutions



WATER & GARDEN DRAINAGE & IRRIGATION

Includes new products for 2021/2022











Fountains & fountain pumps

- **Fountain pumps** 6 Aquarius Fountain Set Classic E
 - 8 Aquarius Eco Expert 12 V



FOUNTAIN PUMP SETS

AQUARIUS FOUNTAIN SET CLASSIC 💯

An economical all-rounder – now in three new sizes with sophisticated pump technology



- Energy-efficient water feature pump with three attractive nozzle patterns
- Second, separately adjustable outlet
- Includes three fountain attachments and telescopic pipe extension with integrated swivel head for a variety of water patterns
- Easy mechanical adjustment of the fountain height
- Energy consumption is reduced by up to 40 % in comparison to previous models thanks to the economical pump technology while maintaining a high water pressure and a high flow rate
- Integrated thermo protection

PRODUCT DETAILS





Second outlet

On the second separately adjustable outlet, a small watercourse or water spout can be connected. Suitable for ½" to 1" (13 to 25 mm) hoses.

Water patterns Three different fountain attachments are included in the scope of delivery: Vulcan, Lava and Magma.

Aquarius Fountain Set Classic 750

Aquarius Fountain Set Classic 1000

Aquarius Fountain Set Classic 2000 E

Aquarius Fountain Set Classic 3000 E

Aquarius Fountain Set Classic 4000 E


Extras

Top product characteristics

- Particularly economical effectively reduces running costs
- Includes three fountain attachments and an optimised nozzle bracket
- Second outlet that can be adjusted separately for small watercourses or water features

Recommendation

Extend the service life of your pump and ensure lasting high performance with the special AquaActiv PumpClean cleaner.



TECHNICAL DATA

H cm

70

75

155

195

220

45

70

120

160

180

20

35

65

75

80

_

_

_

_

60

70

120

150

180

70

80

155

190

220

| | | Aquarius Fountain Set Classic 750 | Aquarius Fountain Set Classic 1000 | Aquarius Fountain Set Classic 2000 E | Aquarius Fountain Set Classic 3000 E | Aquarius Fountain Set Classic 4000 E | |
|-----------------------------------|-------|--------------------------------------|---------------------------------------|---|---|---|--|
| Dimensions (L x W x H) | mm | | | 180 x 205 x 140 | | | |
| Rated voltage | | | | 220 - 240 V / 50 Hz | | | |
| Power consumption | W | 9 | 11 | 18 | 26 | 42 | |
| Power cable length | m | | | 10.00 | | | |
| Net weight | kg | 1.70 | 1.80 | 2.00 | 2.20 | 2.70 | |
| Guarantee (+ request guarantee) * | Years | | | 2 + 1 | | | |
| Max. flow rate | l/min | 12 | 16 | 35 | 50 | 66 | |
| Max. flow rate | l/h | 720 | 1000 | 2100 | 3000 | 4000 | |
| Max. head height, metres | m | 1.10 | 1.30 | 2.10 | 2.50 | 2.90 | |
| Pressure-side connection | mm | | | 25 | | | |
| Pressure-side connection | | | | 1" | | | |
| Suction-side connection | mm | | | - | | | |
| Suction-side connection | | | | - | | | |
| Hose connection | mm | | | 13 / 19 / 25 | | | |
| Hose connection | | | | 1⁄2", 3⁄4", 1" | | | |
| Filter intake surface | cm² | | | 230 | | | |
| Electronic adjustment | | | | No | | | |
| Number of nozzles | Units | | | 3 | | | |
| Telescopic nozzle extension | cm | 16 - 29 | | | | | |
| Setup type | | | U | nderwater installation on | y | | |
| Item no. (GB-Version) | | 43042 | 57438 | 77375 | 77376 | 77377 | |
| Item no. | | 43041 | 57399 | 77371 | 77372 | 77374 | |



*Guarantee valid under the quarantee conditions from OASE. Can be viewed at www.oase.com/quarantee



Extras

- Suitable for networks and powerhouse with low energy consumption
- Patented frost protection to -20° C
- Switchable dynamic program for impressive fountains

Recommendation

With the OASE fountain attachments, different water patterns can be created to suit your taste. The fountain attachments can be staged in combination with the matching optional OASE illumination. For an attractive bubbling stone water pattern, for pump selection, calculate 0.5 - 11 / min water per cm of stone diameter. Extend the service life of your fountain and ensure lasting high performance with the special AquaActiv PumpClean cleaner.

AQUARIUS ECO EXPERT 12 V

Dynamic, variable water patterns – even in swimming ponds



- Network-enabled, energy-efficient pump generation with extremely powerful yet economical pump capacity – now available with safer 12 V technology for swimming ponds and natural pools (Aquarius Eco Expert 20000/12 V)
- Alternating fountain heights can be individually switched with power consumption in-line with demand
- Robust and durable stainless steel housing for stability
- Ergonomic handle for easy transport and installation
- Unique, patented frost protection: the pump will not be damaged at temperatures down to as low as $-20^\circ\,{\rm C}$
- Suitable for submersed or dry use or for extended use in sea water
- With adapter set for connection of 1" and 1 ½" nozzles
- MADE IN GERMANY: precise and reliable German engineering skills at a particularly high quality level
- Protection against running dry and blocking through Environmental Function Control (EFC by OASE)
- System requirements: To use the EGC functions, an InScenio EGC Controller Home/Cloud, InScenio FM-Master EGC Home/Cloud, InScenio FM-Master WiFi EGC or InScenio FM-Master WiFi Version 2.0 or later is required

Aquarius Eco Expert 20000/12 V

• This electronic switching power supply was developed in-house and is perfectly designed for transforming an electricity supply from 230 V to 12 V

»Environmental Function Control« The pumps automatically switch off if they run dry or become blocked, preventing damage to the device.



PRODUCT DETAILS







Robust filter basket

Thanks to this robust stainless steel filter basket, coarse debris particles up to 4 mm in size are easily displaced.

Adapter set

An adapter set for connecting all 1" and 11/2" OASE fountain attachments is included in the scope of delivery of the Aquarius Eco Expert fountain pumps.



Handle operation

Connection for EGC

The ergonomic handle, aligned with the pump's centre of gravity facilitates transport and installation. The switch for the dynamic function is positioned directly on the handle.

Innovative, convenient and handy. The

Eco Expert pumps can be regulated and

operated by control devices such as the

Eco-Control, all via EGC-Connection.

TECHNICAL DATA

| | | Aquarius Eco Expert 20000 / 12 V | | |
|--|-------|--|--|--|
| Dimensions (L x W x H) | mm | 490 x 215 x 235 | | |
| Rated voltage | | - | | |
| Rated voltage (primary, secondary) | | 220 - 240 V / 50 - 60 Hz, 12 V / DC | | |
| Power consumption | W | 30 - 240 | | |
| Power cable length | m | 8.00 | | |
| Cable length 12 V device (with power unit) | m | 2.50 (Power unit) + 8.00 | | |
| Net weight | kg | 14.90 | | |
| Guarantee (+ request guarantee) [•] | Years | 3 + 2 | | |
| Max. flow rate | l/min | 333 | | |
| Max. flow rate | l/h | 20000 | | |
| Max. head height, metres | m | 6.60 | | |
| Pressure-side connection | mm | 50 | | |
| Pressure-side connection | | 2" | | |
| Suction-side connection | mm | 50 | | |
| Suction-side connection | | 2" | | |
| Hose connection | mm | 38 / 50 | | |
| Hose connection | | 1 ½", 2" | | |
| Filter intake surface | cm² | 1000 | | |
| Connection EGC | | Yes | | |
| Electronic adjustment | | Yes | | |
| Number of nozzles | Units | - | | |
| Telescopic nozzle extension | cm | - | | |
| Setup type | | Can be set up underwater & dry installed | | |
| Item no. (GB-Version) | | - | | |
| Item no. | | 78109 | | |
| Si 🖄 錔 🕎 🐔 | Š | | | |

Extras

Accessories

Vulcan 43 - 3 Silver 43-jet fountain with 4 levels and a jet diameter of 3 mm. 50766 Item no.

Cluster Eco 15 - 38

21 single jets generate an imposing continuous jet with a diameter of 38 mm

45480 Item no. Schaumsprudler 35 - 10 E Attractive fountain attachment Schaumsprudler 35-10 E made of

stainless steel. Item no. 50984

Schaumsprudler 55 - 15 E

Attractive Schaumsprudler 55-15 E fountain attachment made of stainless steel.

Item no. 50987 Eco Control

With the clever EGC control device, the capacity of the connected pumps can be simultaneously accessed and regulated directly on the controller. Including illuminated display – without separate power supply!

47673 Item no. InScenio FM-Master EGC Home

Item no. 70785

Item no. 70786 (GB-Version)

InScenio FM-Master EGC Cloud This innovative switch centre can be operated via smartphone or tablet In addition to four power outlets with an integrated timer, it also has an EGC connection Item no. 70788

Item no. 70789 (GB-Version)

InScenio EGC Controller Home Item no. 55316 InScenio EGC Controller Cloud Item no. 55317

Connection Cable EGC 2.5 m Item no. 47038 Connection Cable EGC 5.0 m Item no. 47039 Connection Cable EGC 10.0 m Item no. 47040 Cable connector EGC Item no. 47788

Extension cable Expert 12 V 10 m Item no. 84032
























SWITCH OFF WITH EASY GARDEN CONTROL

THE NEW OASE EASY CONTROL APP MAKES IT POSSIBLE.

- \cdot Convenient control of all pond and garden devices
- \cdot Clear status displays
- $\cdot\, Error\, message\, display$

Includes Easy Aquarium Control: The app also offers all aquarists the option of smart control for connected aquarium devices.

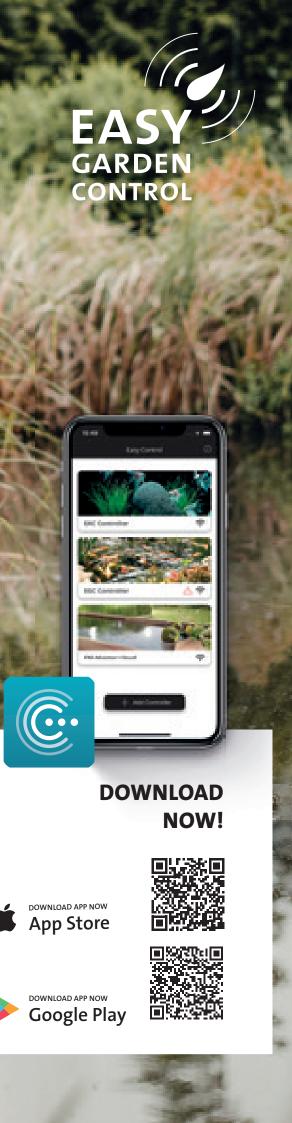



FILTER, WATERCOURSE AND SWIM POND PUMPS

Filter, Watercourse and Swim pond pumps

- 12 AquaMax Eco Premium 12 V
- 14 AquaMax Eco Expert 12 V
- 16 AquaMax Eco Titanium

VATERCOURSE & SWIM POND PUMPS



AQUAMAX ECO PREMIUM 12 V

Efficient water movement at multiple pond zones, especially for swimming ponds

»Environmental Function Control« The pumps automatically switch off if they run dry or become blocked, preventing damage to the device.



- Can displace plant remains or fish waste particles up to 11 mm
- Supplementary, patented connection of filter accessories for debris supply from more distant pond zones
- Outstanding energy balance: reliable displacement using even less energy
- Elegant design with clever operating elements
- Maximum convenience thanks to ergonomic and easily accessible handles
- »Environmental Function Control« (EFC by OASE) protects against dry run and blocking
- MADE IN GERMANY: precise and reliable German engineering skills at a particularly high quality level
- With safe 12 V technology perfect for use in swimming pools and natural pools

PRODUCT DETAILS






Regulation + 2nd Inlet

A 2nd inlet allows connection of a satellite filter or surface skimmer. This allows the flow through to be mechanically adjusted from 0 to 100 %.



12 V power unit

For safety, low voltage transformer, suitable for swim ponds. Power unit must be setup at least 2 m from the pond.



TECHNICAL DATA

| | | AquaMax Eco Premium 6000 / 12 V | AquaMax Eco Premium 12000 / 12 V | | |
|--|-------|---------------------------------------|--|--|--|
| Dimensions (L x W x H) | mm | 340 x 28 | 0 x 165 | | |
| Rated voltage (primary, secondary) | | 220 - 240 V / 50/ | 60 Hz, 12 V / DC | | |
| Power consumption | W | 45 | 95 | | |
| Cable length 12 V device (with power unit) | m | 2.50 (Power | unit) + 8.00 | | |
| Net weight | kg | 8.70 | 10.60 | | |
| Guarantee (+ request guarantee) * | Years | 3 + | 2 | | |
| Max. flow rate | l/min | 100 | 190 | | |
| Max. flow rate | l/h | 6000 | 11400 | | |
| Max. head height, metres | m | 3.20 | | | |
| Pressure-side connection | mm | 50 | | | |
| Pressure-side connection | | 2" | | | |
| Suction-side connection | mm | 50 | | | |
| Suction-side connection | | 2" | | | |
| Hose connection | mm | 25 / 32 / 38 | 25 / 32 / 38 / 50 | | |
| Hose connection | | 1", 1 ¼", 1 ½" | 1", 1 ¼", 1 ½", 2" | | |
| Filter intake surface | cm² | 100 | 00 | | |
| Max. coarse debris displacement | mm | 10 | 11 | | |
| Electronic adjustment | | No | | | |
| Setup type | | Can be set up underv | vater & dry installed | | |
| Item no. (GB-Version) | | - | | | |
| Item no. | | 50730 | 50382 | | |
| 51 🖄 😭 🗧 |) | wy 🙊 😳 | 12V DE | | |

Extras

Top product characteristics

- Outstanding energy efficiency and displacement capacity
- Simultaneous supply of debris through connection of filter accessories on the patented, second inlet
- Perfect for use in swimming ponds and natural pools thanks to safe 12 V technology

Recommendation

Extend the service life of your pump and ensure lasting high performance with the special AquaActiv PumpClean cleaner.

Accessories

Satellite filter AquaMax Eco Enables intake of polluted water at an additional point on the pond floor.



Item no. 57177

AquaSkim 20 Item no. 51236 AquaSkim 40 Item no. 56907 Skimmers for powerful suctioning of pond surfaces. Remove particles before they settle and impair the water quality. Safety grid AquaMax Eco 2" Item no. 73536

Extension cable Premium 12 V 10 m Item no. 84031







Extras

Top product characteristics

- Energy efficient with a high flow rate
- Network-enabled and equipped with Seasonal Flow Control and Environmental Function Control
- Perfect for use in swimming ponds and natural pools thanks to safe 12 V technology

Recommendation

The AquaMax Eco Expert makes it incredibly easy to supply large filter systems for koi ponds, swimming ponds, sophisticated watercourses and waterfalls. The InScenio FM-Master EGC or the EGC controller accessory can be used as smart controls to adjust the performance of these energy-efficient powerhouses, control each unit individually and read out values. New: Now also available in 27,000 l/h size as a 12 V version — ideal for swimming ponds and natural pools!

AQUAMAX ECO EXPERT 12 V

Energy-efficient powerhouses for even the most demanding of systems – ideal for swimming ponds and natural pools

EASY GARDEN CONTROL

»Seasonal Flow Control«

The pumps adapt to the pond ecology throughout the year and support the pond biology through temperature-dependant water circulation.

»Environmental Function Control«

The pumps automatically switch off if they run dry or become blocked, preventing damage to the device.



- Ideal for demanding filter systems used in large watercourses and waterfalls, while the 12 V version is perfect for swimming ponds and natural pools, even if they contain sea water!
- Extreme performance with an energy-efficient pump capacity
- Very high efficiency with excellent pump capacity for coarse debris particles up to 11 mm in size
- Robust and durable stainless steel housing
- Unique patented frost protection down to -20°C
- Can be set up underwater & dry installed
- Patented »Seasonal Flow Control« for intelligent and environmentally-conscious regulation of flow rate and delivery head
- Innovative Environmental Function Control: Optimal device protection as the system shuts off automatically if it runs dry or if there's a blockage
- MADE IN GERMANY: precise and reliable German engineering skills at a particularly high quality level
- System requirements: To use the EGC functions, an InScenio EGC Controller Home/Cloud, InScenio FM-Master EGC Home/Cloud, InScenio FM-Master WiFi EGC or InScenio FM-Master WiFi Version 2.0 or later is required

ATERCOURSE & SWIM POND PUMPS

PRODUCT DETAILS







Robust filter basket

Thanks to this robust stainless steel filter basket, coarse debris particles up to 11 mm are displaced with ease.

12 V power unit

For safety, low voltage transformer, suitable for swim ponds. Power unit must be setup at least 2 m from the pond.



Convenient operation

Connection for EGC

The ergonomic handle, aligned with the pump's centre of gravity facilitates transport and installation. The switch for SFC function is practically positioned directly on the handle.

Innovative, convenient and handy. The

Eco Expert pumps can be regulated and

operated by control devices such as the

Eco-Control. all via EGC-Connection.



TECHNICAL DATA

| | | AquaMax Eco Expert 20000 / 12 V | AquaMax Eco Expert 27000 / 12 V | |
|--|-------|--|---------------------------------------|--|
| Dimensions (L x W x H) | mm | 490 x 240 x 210 | 540 x 250 x 220 | |
| Rated voltage | | - | | |
| Rated voltage (primary, secondary) | | 220 - 240 V / 50/ | 60 Hz, 12 V / DC | |
| Power consumption | W | 30 - 2 | 260 | |
| Power cable length | m | 8.0 | 0 | |
| Cable length 12 V device (with power unit) | m | 2.50 (Power) | unit) + 8.00 | |
| Net weight | kg | 14.60 | 16.50 | |
| Guarantee (+ request guarantee) [•] | Years | 3 + | 2 | |
| Max. flow rate | l/min | 321 | 450 | |
| Max. flow rate | l/h | 19300 | 27000 | |
| Max. head height, metres | m | 4.6 | 0 | |
| Pressure-side connection | mm | 50 | | |
| Pressure-side connection | | 2' | 1 | |
| Suction-side connection | mm | 50 | 63 | |
| Suction-side connection | | 2" | 2 1⁄2" | |
| Hose connection | mm | 38 / | 50 | |
| Hose connection | | 1 ½" | , 2" | |
| Filter intake surface | cm² | 1060 | 1120 | |
| Max. coarse debris displacement | mm | 11 | | |
| Connection EGC | | Ye | S | |
| Electronic adjustment | | Yes | | |
| Setup type | | Can be set up underwater & dry installed | | |
| Item no. (GB-Version) | | - | | |
| Item no. | | 55313 | 77918 | |

Extras

Accessories

Eco Control

With the clever EGC control device, the capacity of the connected pumps can be simultaneously accessed and regulated directly on the controller. Including illuminated display – without separate power supply! Item no.



InScenio FM-Master EGC Home This innovative switch centre can be operated via smartphone or tablet In addition to four power outlets with an integrated timer, it also has an EGC connection



Item no.

Item no.

Item no.

Item no.

Ò

<u>(D</u>E

Item no. (GB-Version) 70786 InScenio FM-Master EGC Cloud 70788 Item no.

Item no. (GB-Version) 70789

InScenio EGC Controller Home Innovative controller for networking EGC-enabled OASE devices with each other and the home network. It can be controlled via WiFi using a tablet or smart phone (iOS or Android). Item no. 55316



InScenio EGC Controller Cloud 55317 Connection Cable EGC 2.5 m 47038 Connection Cable EGC 5.0 m 47039 Connection Cable EGC 10.0 m 47040

Cable connector EGC 47788 Item no. Extension cable Expert 12 V 10 m 84032 Item no.



AquaMax Eco Expert 20000 - 27000 / 12V 6 5 3 2 Q(I/min) 100 150 200 250 300 350 400 450 500






AQUAMAX ECO TITANIUM Full speed ahead for gravitational filter systems – even on koi ponds!

"Environmental Function Control" The pumps automatically switch off if they run dry or become blocked, preventing damage to the device. "Seasonal Flow Control"

The pumps adapt to the pond ecology throughout the year and support the pond biology through temperature-dependant water circulation.





AquaMax Eco Titanium 51000



AquaMax Eco Titanium 81000





- Pumps coarse debris up to 6 mm in size
- Innovative, energy-efficient gravity filter pump for large bodies of water, even with koi stock
- Flow-optimised hydraulics help to achieve an outstanding level of efficiency
- Robust pump housing made of cast stainless steel with large base for safe placement
- Rotor shaft and bearings made from high-quality SIC ceramics for optimal reliability and longevity
- Suitable for submersed or dry use even in sea water
- Ideal for installation in a pump chamber
- Protection against running dry and blocking through Environmental Function Control (EFC by OASE)
- Patented Seasonal Flow Control (SFC) for intelligent and environmentally conscious regulation of flow rate and pump head height
- Using optional accessories, when the SFC function is enabled, an extra 30% can be saved in energy
- MADE IN GERMANY: precise and reliable German engineering skills at a particularly high quality level
- System requirements: To use the EGC functions, an InScenio EGC Controller Home/Cloud, InScenio FM-Master EGC Home/Cloud, InScenio FM-Master WiFi EGC or InScenio FM-Master WiFi Version 2.0 or later is required

LTER AND WATERCOURSE PUMPS

PRODUCT DETAILS







Robust pump housing

Cast stainless steel enables the achievement of durable, above-average precision and energy-efficiency. The entire pump housing can be adjusted upwards by 90°.


Special channel-type impeller

The impeller impresses through its extremely long service life. Even under continuous load, signs of wear cannot be detected



Connection for EGC control devices

The pump can be conveniently operated via innovative control devices such as the Eco Control.



TECHNICAL DATA

| | | AquaMax Eco Titanium 31000 | AquaMax Eco Titanium 51000 | AquaMax Eco Titanium 81000 | |
|-----------------------------------|-------|----------------------------------|----------------------------------|----------------------------------|--|
| Dimensions (L x W x H) | mm | 275 x 175 x 200 | 350 x 220 x 245 | 390 x 235 x 245 | |
| Rated voltage | | 22 | 0 - 240 V / 50/60 H | Ηz | |
| Power consumption | W | 35 - 170 | 70 - 320 | 100 - 730 | |
| Power cable length | m | | 10.00 | | |
| Net weight | kg | 9.20 | 16.50 | 17.50 | |
| Guarantee (+ request guarantee) * | Years | 3 + 2 | | | |
| Max. flow rate | l/min | 525 | 850 | 1350 | |
| Max. flow rate | l/h | 31500 | 51000 | 81000 | |
| Max. head height, metres | m | 3.30 | 4.00 | 5.50 | |
| Pressure-side connection | mm | 75 | 88 | | |
| Pressure-side connection | | G 2 ½" | G | 3" | |
| Suction-side connection | mm | 75 | 8 | 8 | |
| Suction-side connection | | G 2 ½" | G | 3" | |
| Max. coarse debris displacement | mm | | 6 | | |
| Connection EGC | | Yes | | | |
| Electronic adjustment | | Yes | | | |
| Setup type | | Can be set u | p underwater & d | ry installed | |
| Item no. (GB-Version) | | | - | | |
| Item no. | | 73656 | 73657 | 77462 | |
| - ini 🛌 🗟 🖛 🕅 | 5 | × × | 1 | | |

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee

📚 III. 😪 🐜 🖬

Extras

Top product characteristics

- Powerful gravity filter pump for large gravity-fed filter systems
- High-quality materials such as cast stainless steel and SIC ceramics make them extremely durable and reliable
- Network-enabled: Ideal for use with the InScenio FM-Master EGC product range so you can control the system using your home network or the cloud

Recommendation

Think big: This powerhouse from the AquaMax *Eco Titanium range is perfect for efficiently* pumping water that has been cleaned using a *drum filter back to the pond – even over long* distances. Extend the service life of your pump and ensure lasting high performance with the special AquaActiv PumpClean cleaner.

Accessories

Safety grid AquaMax Eco 2 ½" Optional safety attachment for wet setup in a pump chamber, prevents unintentional debris reaching the suction inlet. 48597 Item no.

Safety grid AquaMax Eco 3" Item no. 73658

Eco Control

With the clever EGC control device, the capacity of the connected pumps can be simultaneously accessed and regulated directly on the controller. Including illuminated display – without separate power supply!

Item no. 47673



This innovative switch centre can be operated via smartphone or tablet In addition to four power outlets with an integrated timer, it also has an EGC connection Item no. 70785

Item no. (GB-Version) 70786

InScenio FM-Master EGC Cloud Item no. 70788

Item no. (GB-Version) 70789

InScenio EGC Controller Home Innovative controller for networking EGC-enabled OASE devices with each other and the home network. It can be controlled via WiFi using a tablet or smart phone (iOS or Android).

Item no. 55316 InScenio EGC Controller Cloud 55317 Item no. Connection Cable EGC 2.5 m 47038 Item no. Connection Cable EGC 5.0 m Item no. 47039 Connection Cable EGC 10.0 m Item no. 47040 Cable connector EGC Item no. 47788

DE











FILTER AND WATERCOURSE PUMPS







Pond Cleaning & Skimmers

Pond Cleaning 20 Useful pond helpers



Extras

Top product characteristics • Sturdy nets for heavy loads

- Long, telescopic handles for a longer reach
- Available in various shapes for a wide range of applications

POND & ALGAE NET For relaxing work in and on your garden pond

| | | NEW | NEW | NEW | NEW | NEW | |
|-------------------------|-------|--|-------------------------|---|---|---|--|
| Nets | | 1 | | | | | |
| | | Pond net foldable | Pond net rectangular | Pond net triangular | Pond net round extra large | Algae net triangular | |
| Dimensions (L x W x H) | cm | 40 x 38 x 45 | 37 x 30 x 25 | 40 x 41 x 25 | 56 x 56 x 32 | 38 x 39 x 19 | |
| Shape | | triangular | rectangular | triangular | round | triangular | |
| Mesh size | | 5 mr | n | 4 mm | 2 mm | | |
| Guarantee [*] | Years | | | 2 | | | |
| Handle type | | | | telescopic | | | |
| Handle length, min. | cm | 90 | 70 |) | 90 | 60 | |
| Max. handle length | cm | | 150 | | 160 | 150 | |
| Total length, max. | cm | 190 | 187 | 190 | 216 | 188 | |
| Product characteristics | | Other practical uses inc duckweed and algae For relocating fish With telescopic handle Made from high-quality | | Other practical uses include removing foliage, duckweed and algae With telescopic handle Made from high-quality alu- minium | For relocating fish With telescopic handle Deep net | Other practical uses include removing foliage, duckweed and algae With telescopic handle Made from high-quality alu- minium Extra-fine net | |
| Item no. (GB-Version) | | | | - | | | |
| Item no. | | 84296 | 84297 | 84308 | 84310 | 84318 | |

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee









Pond Treatments & Fish Medicines

AquaActiv Pond Treatments 24 Improving water quality – DuoBoost

DuoBoost Provides optimal support of the pond biology – with 2-phase effect



DuoBoost has been specially developed to support pond biology. It consists of two complementary phases of action:

The **first** phase of action is a **gel** that is placed straight in the pond or the filter chamber. This gel is a highly active fluid containing enzymes and bacteria that removes organic dirt, ammonium and nitrite. The filter bacteria are activated at the same time.

The **second** phase of action is a **ball** measuring 2 cm or 5 cm in diameter that dissolves over time, releasing important trace elements, cosubstrates, minerals and valuable additives that are otherwise difficult to put into an artificial pond.

If required, you can repeat treatment with DuoBoost several times a year. Both phases lay the foundations for achieving clear, healthy water and exceptional pond biology. If the water is green, however, you should use a UVC clarifier to remove the algae causing the problem.



Effective water treatment



- Significant improvement of water quality and pond biology
- Simple to use, as often as required
- Important trace elements and minerals for all pond types

The gel and balls can be placed straight in the filter or the pond. The balls will dissolve completely over time. If the pond contains fish, place the balls in the enclosed net before using them.

| | | | | NEW |
|-------------------------------|----|-------|----------|-------|
| AquaActiv | | | DuoBoost | |
| Container size | | 250 | ml | 2.5 l |
| Ball diameter | cm | 5 | 2 | |
| Suitable for ponds up to max. | m³ | 20.0 | 30.0 | 90.0 |
| Item no. (GB-Version) | | | - | |
| Item no. | | 78110 | 78111 | 78112 |

DUOBOOST COUNTER DISPLAY



- Compact counter display for marketing support
- Equipped with 18 sales units
- Easy assembly with easy reloading

The display is ideal for placing near the counter. The display can be reused for different products and is easy to assemble. Its compact size makes it suitable even for smaller sales areas.

| | NEW_ |
|-----------------------|-------------------------------------|
| AquaActiv | DuoBoost Counter Display |
| Scope of delivery | • 18 x DuoBoost 2 cm 250 ml (78111) |
| Item no. (GB-Version) | - |
| Item no. | 84239 |

Safe use

When stocked with fish, the DuoBoost balls can be placed in a practical net.




Rapid development of filter biology To support pond biology, the DuoBoost balls can be inserted directly into the filter.



The foundation for clear water By supporting pond biology and improving water quality, the foundation for a healthy body of water is created.





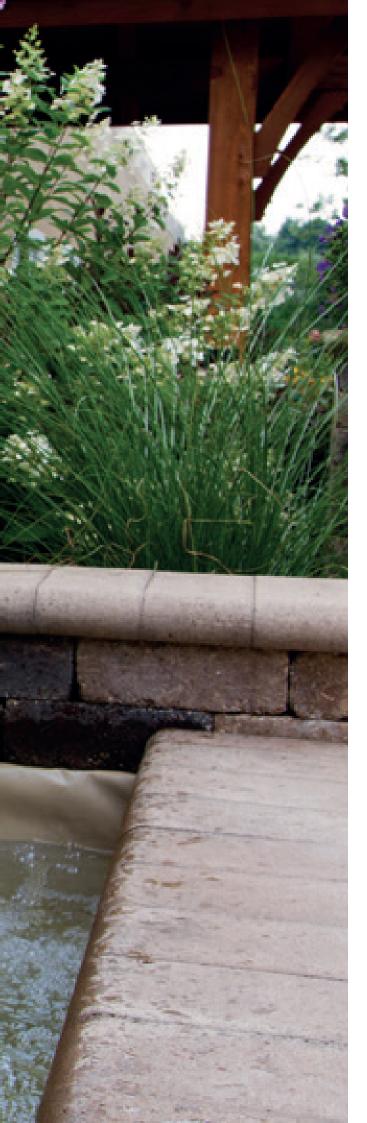



Pond Construction & Landscaping

Water Landscaping

- 28 Fountain bowls
 - 29 Formal spillway
 - 30 Basic watercourse sets
 - 31 Waterfall Complete Set



COPPER FOUNTAIN BOWLS POND C

COPPER FOUNTAIN BOWLS Sophisticated copper water bowl

- Elegant design highlight made from real copper, suitable for small and large gardens
- These copper bowls offer a wide range of design options: choose between a round or a square design, with or without an outlet, and then choose where to put it – for example by the terrace or as part of a pond landscape

Extras

Top product characteristics

- Made from 100% real copper
- Invisible cable connection and hose grommet
- Get creative with your water design thanks to the variety of possible combinations

Accessories

LED Ring warm white Flat, warm-white LED ring – perfect for the copper bowl riser pipe. Ideal for use with existing halogen lamps thanks to 2800 Kelvin colour temperature. 5 m cable included.

84171



Cord seal fitting 1 ½" Item no. 84170

Item no.

Transformer 30 VA with 3 outputs


12 V transformer suitable for LED ring (art. 84171) and/or wall spout lighting (art. 84183). Up to 3 LED rings or wall spout lights can be operated simultaneously. Item no. 85858 Item no. 85859 (GB-Version)



- The water inlet and cable bushing for the lighting (1½" each) are positioned at the base of the bowl, so they cannot be seen from the outside
- Available with a pedestal for a waterfall installation consisting of two copper bowls
- As it ages, copper forms its typical, attractive patina

| | | NEW | | NEW | | NEW, | NEW | |
|-------------------------|-------|--------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|---|--|
| TECHNICAL DAT | A | | | | T | | | |
| | | Copper Bowl Square 50 | Copper Bowl Round 50 | Copper Bowl Round 60 | Copper Bowl Round 75 | Copper Bowl Round 90 | Copper pedestal for copper bowls | |
| Dimensions (L x W x H) | mm | 660 x 70 | 0 x 254 | 736 x 736 x 254 | 660 x 838 x 368 | 914 x 914 x 368 | 406 x 406 x 203 | |
| Net weight | kg | 7.80 | 8.75 | 8.36 | 11.02 | 12.08 | 5.50 | |
| Guarantee * | Years | | | 2 | | | | |
| Overrunning width | mm | 30 | 5 | 152 | 102 | - | | |
| Suction-side connection | mm | | - | | | | | |
| Suction-side connection | | | 1 ½" | | | | | |
| Item no. (GB-Version) | | | | - | | | | |
| Item no. | | 84165 | 84166 | 84167 | 84168 | 84169 | 84164 | |

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee

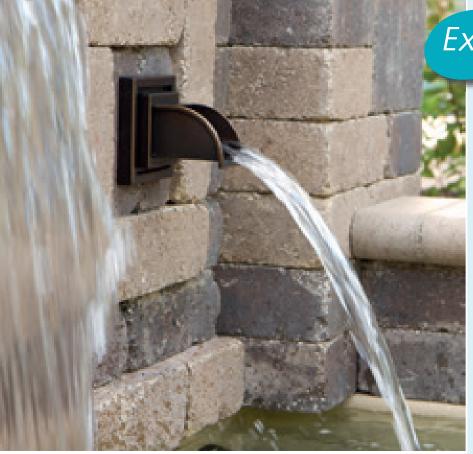

Extras

Top product characteristics

- Solid brass
- Can be illuminated from the inside
 Includes drip edge for a consistent water pattern

Accessories

Wall Spout LED warm white Universal lighting for wall outlets and spring stones with replaceable, warm white LED unit – perfect for use with existing halogen lamps.

Item no. 84183 Connection Kit Wall Spout

Quick and easy installation of the wall outlets on any wall. Also simplifies the subsequent installation of the wall spout lighting. Item no. 85857

Transformer 30 VA with 3 outputs

12 V transformer suitable for LED ring (art. 84171) and/or wall spout lighting (art. 84183). Up to 3 LED rings or wall spout lights can be operated simultaneously. Item no. 85858

Item no. 85858 Item no. 85859 (GB-Version)



FORMAL SPILLWAY

A compact water feature that's ideal in small spaces

- Water spout made of robust, solid brass
- Four shapes available in two colours
- The integrated drip edge prevents backflow beneath the spout
- Can be illuminated from the inside for impressive lighting effects
- Also ideal for columns and narrower walls less than 1 %" as the water inlet is at the back

| | | NEW | NEW | NEW | NEW | NEW | NEW | NEW | NEW |
|-------------------------|-------|-----------------------------------|-----------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|-----------------------------------|-----------------------------------|
| TECHNICAL DAT | A | 2 | ĥ | \$ | 9 | 4 | ۲ | ٩ | • |
| | | Wall Spout Square Copper | Wall Spout Square Bronze | Wall Spout Ellipse Copper | Wall Spout Ellipse Bronze | Wall Spout Rhombus Copper | Wall Spout Rhombus Bronze | Wall Spout Circle Copper | Wall Spout Circle Bronze |
| Dimensions (L x W x H) | mm | 126 x 12 | 5 x 125 | 151 x 127 x 118 | | 126 x 126 x 120 | | 151 x 127 x 148 | |
| Net weight | kg | 1.3 | 9 | 1.4 | 3 | 1.47 | | 1.43 | |
| Guarantee | Years | | | | 2 | 1 | | | |
| Overrunning width | mm | 57 | , | 10 | 0 | 80 | | 55 | |
| Suction-side connection | mm | | 38 | | | | | | |
| Suction-side connection | | 1 ½" | | | | | | | |
| Item no. (GB-Version) | | | - | | | | | | |
| Item no. | | 84176 | 84177 | 84180 | 84181 | 84173 | 84174 | 84178 | 84179 |

WATER SPOUTS

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee



Top product characteristics • Complete set for natural-effect

- watercourses
- Everything included
- Easy to install

Recommendation


Add natural stones to your watercourse source to create a natural-looking and voluminous watercourse. The pond liner can be easily and securely attached to the back of the watercourse source by means of a liner flange, so that nothing stands in the way of watercourses with a high flow rate.

BASIC WATERCOURSE SETS

Everything you need for a natural-effect watercourse

- Sets that contain everything you need to build a natural-effect watercourse – from the pump and the reservoir to the connection elements
- Designed to work perfectly with one another
- Quick and easy to install

| | NEW | NEW | NEW | |
|------------------------------------|--|---|--|--|
| Technical data | | | | |
| | Watercourse Base Set 15000 | Watercourse Base Set 22500 | Watercourse Base Set 35000 | |
| Net weight kg Scope of delivery | 200 g/m² / 2x5 m (43334) 1x AlfaFol black Pre-Packed 0.5mm / 4 x 3 m (50647) 1x AlfaFol black Pre-Packed 0.5mm / 4 x 5 m (50649) 1x Spiral hose black 2", 25 m (57755) 2x Maxima (72952) 1x Pump vault 15000 (72949) 1x Spillway Box 15000 (72946) | 200 g/m² / 2x5 m (43334) 1x AlfaFol black Pre-Packed 0.5mm / 4 x 5 m (50649) 1x AlfaFol black Pre-Packed 0.5 mm / 6 x 5 m (50657) 1x Spiral hose black 2", 25 m (57755) 3x Maxima (72952) 1x Pump vault 55000 (72950) | 140.00 7 x Protective pond fleece 200 g/m² / 2x5 m (43334) 1 x AlfaFol black Pre-Packed 0.5mm / 6 x 4 m (50650) 1 x AlfaFol black Pre-Packed 0.5mm / 6 x 6 m (50658) 1 x Spiral hose black 2", 25 m (57755) 6 x Maxima (72952) 1 x Pump vault 55000 (72945) 1 x Spillway Box 35000 (72948) 1 x AquaMax Eco Expert 26000 (39917) | |
| Item no. (GB-Version) | | - | | |
| Item no. | 84185 | 84189 | 84190 | |

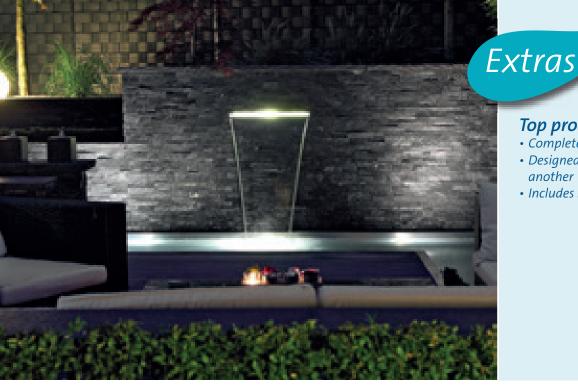

Top product characteristics

- Complete set for a waterfall
- Designed to work perfectly with one another
- Includes lighting

COMPLETE WATERFALL SET Everything you need to build a waterfall

- Waterfall sets, designed to work perfectly together: Includes the pump, reservoir, waterfall, lighting, Silent Splash to prevent splashing and the connection elements
- Quick and easy to install








Well-equipped With the versatile accessories from OASE


Whether watering your vegetable garden or for setting up domestic waterworks – OASE has all the accessories you need to equip your pump for every situation. Our large selection of accessories includes everything from connection elements and an electronic pump controller, to water filters and much more.


ACCESSORIES starting on page 34 Connection set Pressure Well

33

PRESSURE WELL CONNECTION SET

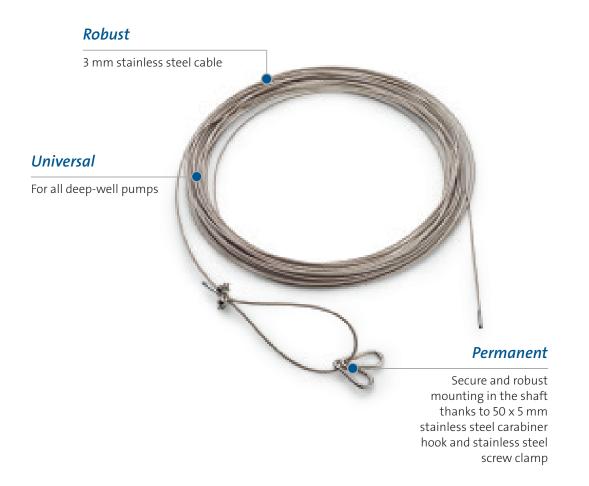

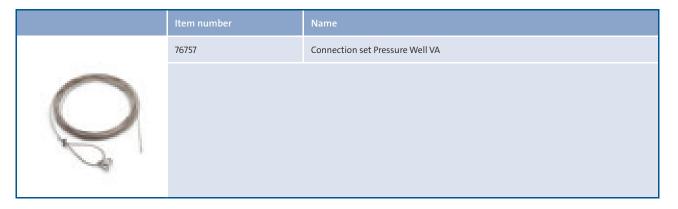

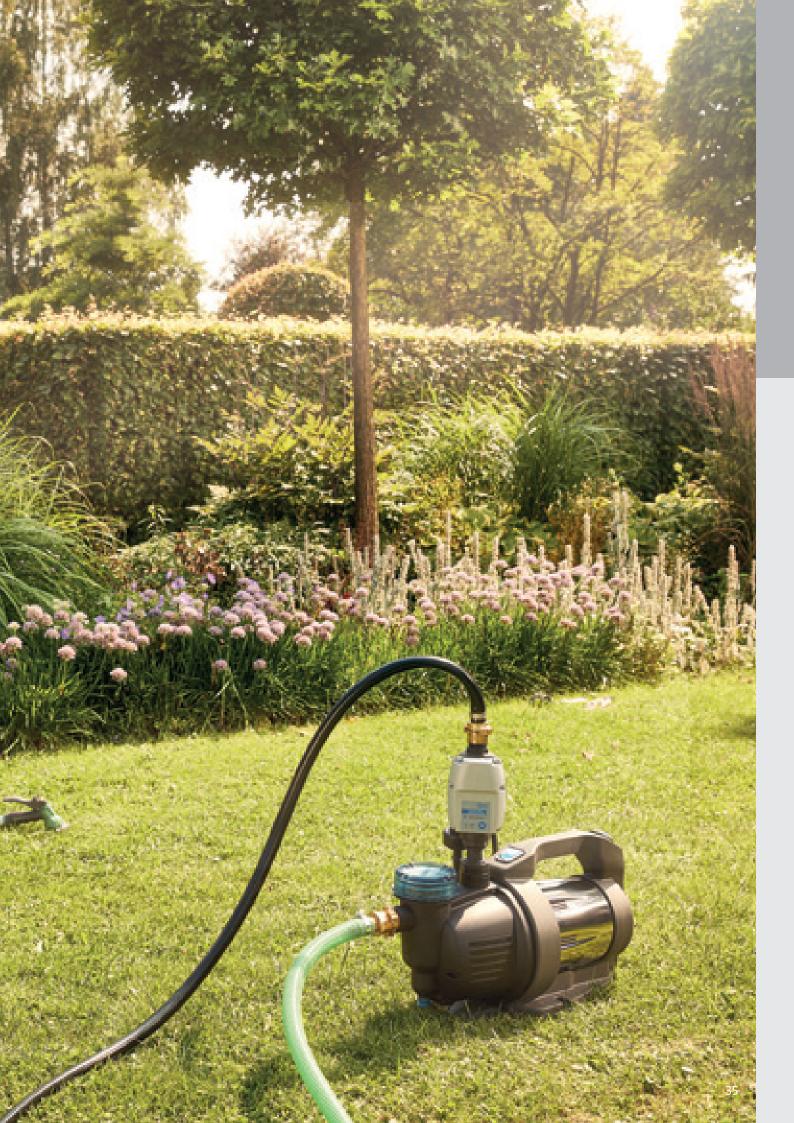



DISCONTINUATION LIST

DISCONTINUATION LIST 2021

| ltem no. | Item no. (GB-version) | Product name | Country variant | Substi- tution | Item no. (GB-version) | |
|----------|--------------------------|---------------------------------------|--------------------|-------------------|--------------------------|--|
| 57400 | 57439 | Aquarius Fountain Set Classic 1500 | INT | 77371 | 77375 | |
| 57401 | 57440 | Aquarius Fountain Set Classic 2500 | INT | 77372 | 77376 | |
| 57402 | 57441 | Aquarius Fountain Set Classic 3500 | INT | 77374 | 77377 | |
| 50946 | - | Bitron Gravity 55 W | INT | 73374 | - | |
| 56886 | - | InScenio FM-Profimaster | INT | | - | |
| 51043 | - | LunAqua Terra LED Set 3 | INT | | - | |
| 51056 | - | LunAqua Terra LED Solo | INT | | - | |
| 50507 | - | LunAqua Maxi LED Set 1 | INT | | - | |
| 51970 | - | LunAqua Power LED XL 4000 Narrow Spot | INT | | - | |
| 40290 | - | LunAqua Micro Eco Set | INT | | - | |
| 36866 | - | Pond figures Teal drake | INT | | - | |
| 36867 | - | Pond figures Teal female | INT | | - | |
| 36775 | - | Water spouts Duck | INT | | - | |
| 50327 | - | Water reservoir cover Trio/Quintet | INT | | - | |
| 43127 | 43131 | ProMax Garden Automatic 5000 | INT | | - | |
| 43128 | 43132 | ProMax Garden Automatic 6000/5 | INT | | - | |



| Old catalogue page | Segment |
|-----------------------|---------------------------------|
| 39 | Fountains & fountain pumps |
| | |
| 39 | Fountains & fountain pumps |
| 39 | Fountains & fountain pumps |
| 153 | Filters, UVC & Aeration |
| 251 | Illumination & Power |
| 227 | Illumination & Power |
| 227 | Illumination & Power |
| 235 | Illumination & Power |
| 239 | Illumination & Power |
| 242 | Illumination & Power |
| 290 | Pond Construction & Landscaping |
| 290 | Pond Construction & Landscaping |
| 290 | Pond Construction & Landscaping |
| 297 | Pond Construction & Landscaping |
| 397 | Irrigation |
| 397 | Irrigation |

37

Notes

Notes



0315

\$

INSPIRATION AND INFORMATION HAVE A NEW DIGITAL HOME.

Gartenteiche-fri

Visit us now at **www.oase.com**

Your OASE dealer:



www.oase.com

OASE GmbH

Post Box 20 69 48469 Hörstel Germany ↔ +49 (0) 5454 80-0
↔ +49 (0) 5454 80-9253
☑ info@oase.com

OASE S.A.

Avenue de la Marne Parc du Molinel Bât F – Rez de Chaussée 59290 Wasquehal France $(^{\circ}$ +33 (0) 320 82 00 45 $\stackrel{\oplus}{=}$ +33 (0) 320 82 99 32 $\stackrel{\cong}{=}$ info.fr@case.com

OASE Türkiye

Barbaros Mh.Ihlamur (Hasat sk) No:3 Uphill Towers B Blok D:55 34746 Atasehir/Istanbul Turkey [©] +90 (0) 216 688 14 60 [➡] +90 (0) 216 688 14 57 i info.tr@oase.com

OASE North America, Inc.

1727 Old Okeechobee Rd. West Palm Beach FL 33409 USA [©] +1 (0) 800 365 3880 [⊕] +1 (0) 800 262 7339 ⊠ info.na@oase.com

OASE (UK) LTD. The Old Cart Shed

Apsley Barns Andover Hampshire SP11 6NA United Kingdom ♥ +44 (0) 1256 896 886 ➡ +44 (0) 1256 896 489 ➡ enquiries@oase.com

OASE ESPAÑA Casa Jardín S.L.U.

OASE Asia Pacific Pte. Ltd.

© 451 Goldhill Plaza #17-01 Singapore 308900 © +65 (0) 6337 2838 ➡ +65 (0) 6337 6878 ⊠ info@oase.com

OASE Italia Srl Via delle Industrie, 16 36050 Cartigliano (VI)

OASE B.V.

Dooren 107 1785 Merchtem Belgium ♥ +31 (0) 900 246 22 10 ➡ +31 (0) 800 023 01 86 ☞ info.nl@oase.com (NL)

мιх

Paper from onsible sou

FSC* C011279

OASE Kereskedelmi Kft

Hegyalja út 7-13 1016 Budapest Hungary ℓ +361 (0) 393 50 40 ➡ +361 (0) 393 50 41 ⊠ info.hu@oase.com

OASE Middle East FZE

Dubai Airport Freezone East Wing Building 1E Unit 202 P.O. Box 54966 Dubai, UAE © +97 (0) 14 29 94 847 ■ +97 (0) 9 94 839 ⊠ uae@oase.com

OASE Japan GK

Yokohama West Bldg. 2F 27-9 Kusunoki-cho, Nishi-ku Yokohama-shi kangawa 220-0003 Japan ♥ +81 (0) 45 594 8440 ➡ +81 (0) 45 594 8441 ☞ customer-service.jp@oase.com

OASE B.V.

OASE Spólka z o.o.

OASE China

No. 80 North Dongting Road Taicang, Jiangsu China [©] +86 (0) 512 5371 9578 **➡** +86 (0) 512 5371 9555 ⊠ info.cn@oase.com The products shown / offered are exclusively intended for the purpose described in each case. Catalogue depictions do not constitute a product description in the sense of characteristics that we are contractually obligated to provide. We expressly state that minor deviations of our products from the photographed products are not defects. With the publication of this catalogue, all older catalogue versions are invalid. Use of our image data is only permitted after obtaining our prior written consent, through OASE.Our general terms and conditions apply, which you can yow and download at **www.oase.com**! 62199/08-20/0A